

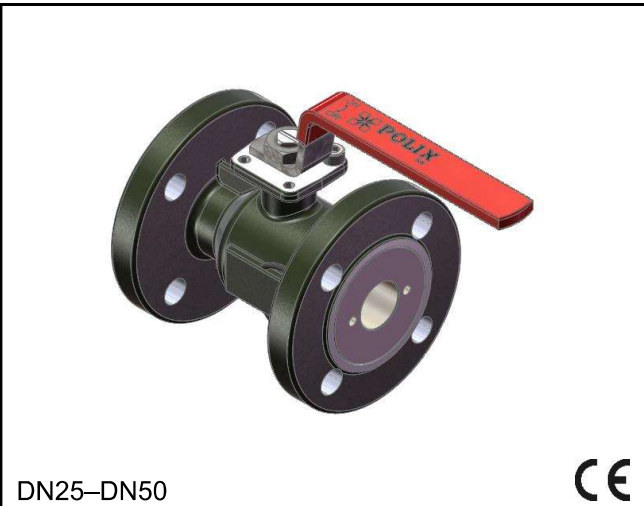


BALL VALVE
FULL BORE, DN25–DN200

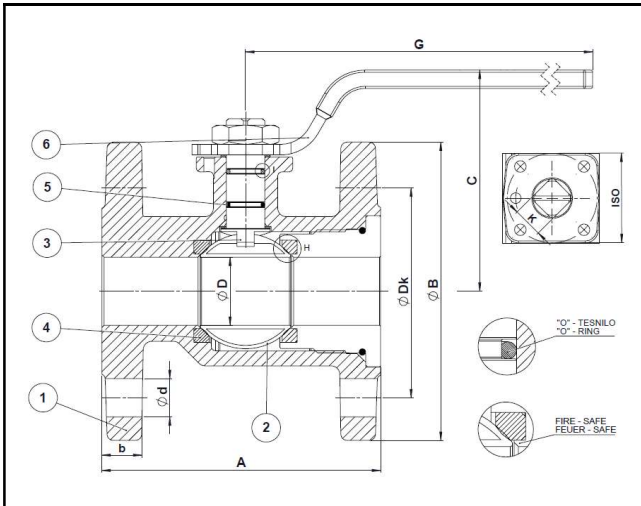


DN25–DN50

CE

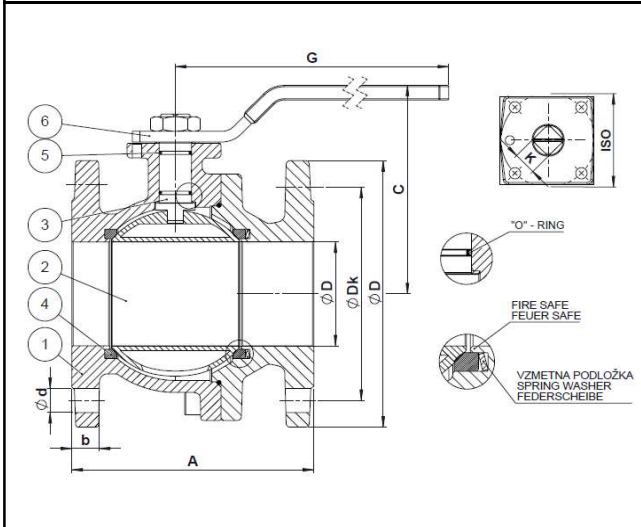

DN65–DN150

CE

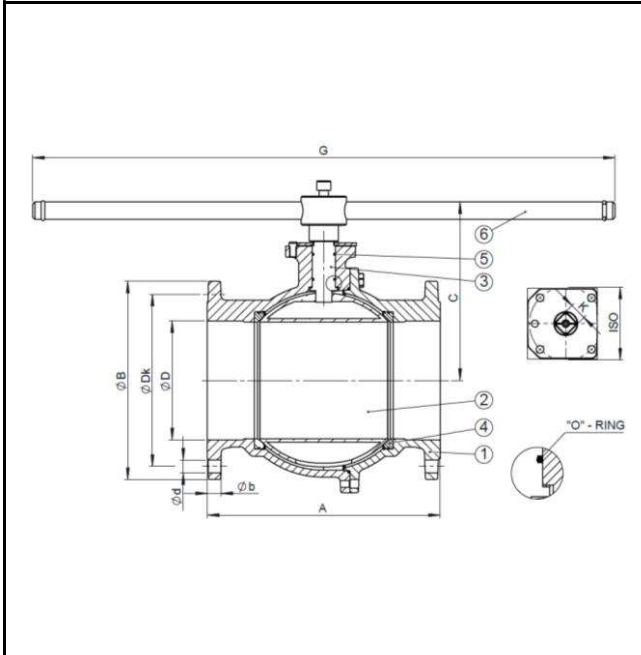

DN200

CE

Materials

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X30Cr13 (A420)
4	Seats	PTFE
5	O-Ring	PTFE + EPDM
6	Handle	Carbon steel (Galvanized) – S235JR (St 37-2)

DN ... PN16 DP PX PX - ISO

PN16

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
	25	125	115	76	25	153	18	85	14	4	F04	□11 x 13,5	3,85
	32	130	140	92	31	237	18	100	18	4	F04	□14 x 18	5,60
	40	140	150	97	39	276	18	110	18	4	F05	□14 x 18	6,75
	50	150	165	105	49	276	20	125	18	4	F05	□14 x 18	8,90
	65	170	185	124	63	340	18	145	18	4	F07	□17 x 23	14,00
	80	180	200	133	76	340	20	160	18	8	F07	□17 x 23	17,65
	100	190	220	153	100	340	20	180	18	8	F07	□17 x 23	21,80
	125	200	250	183	125	541	22	210	18	8	F10	□22 x 27	29,70
	125	325*	250	183	125	541	22	210	18	8	F10	□22 x 27	34,60
	150	210	285	203	142	541	22	240	22	8	F10	□22 x 27	38,55
	150	350*	285	203	142	541	22	240	22	8	F10	□22 x 27	45,70
	200	400*	340	316	200	1000	24	295	22	12	F12	□27 x 31	85,65

Notes

DN25 and DN32 are with inox full ball.

Article numbers for DN25–DN50 are the same for PN16 and PN40 and are always declared as PN40.

Face to face dimensions conform to DIN3202 F4.

*Face to face dimensions conform to DIN3202 F5.